357 – Urban Residential Zone, Infill Garden Suite (RS3-ig)

RS3-ig

Intent: To accommodate Single Detached Dwellings and Garden Suites on urban Lots in the Urban 3-Infill Land Use Designation

357.1 Permitted Uses

	Permitted Uses Table for RS3-ig Zone	
Principal Uses		
	Residential Care	
	Single Detached Dwelling	
	3. [Repealed.] (B/L 3249-2022)	
	4. Boarding House (B/L 3249-2022)	
	Accessory Uses	
	5. Short-Term Rental Accommodations (B/L 3670-2025)	

- 6. Boarding
- 7. Garden Suite
- 8. Home Occupation Level 2
- 9. Secondary Suite

357.2 Site Specific Permitted Uses

n/a

357.3 Development Regulations

Development Regulations Table for RS3-ig Zone		
	Column I	Column II
.1	Density (maximum)	 a. Floor Space Ratio – 0.5, excluding the floor area of a Garden Suite
.2	Minimum Setbacks	a. Principal Building – 6.0 m
	(Front Lot Line)	b. Accessory Building or Structure – 6.0 m
.3	Minimum Setbacks (Rear Lot Line)	 a. Principal Building – 6.0 m b. Garden Suite – 1.5 m c. Accessory Building or Structure – 1.5 m
.4	Minimum Setbacks (Interior Side Lot Line)	 a. Principal Building – 1.5 m b. Garden Suite – 1.5 m c. Accessory Building or Structure – 1.5 m
.5	Minimum Setbacks (Exterior Side Lot Line)	 a. Principal Building – 4.5 m b. Garden Suite – 4.5 m c. Accessory Building or Structure – 4.5 m
.6	Minimum Setbacks between Buildings	 a. Between Principal Building and Garden Suite – 6.0 m b. Between Principal Building and Accessory Building or Structure - 1.5 m c. Between Garden Suite and Accessory Building or Structure – 1.5 m

Last modified: July 15, 2025

Section 357-Page 1 of 3 Zoning Bylaw No. 2400-2014



357 – Urban Residential Zone, Infill Garden Suite (RS3-ig)

RS3-ig

	a. Principal Building - 8.5 m or three
	Storeys, whichever is less
.7 Height (maximun	b. Garden Suite – 4.5 m or one Storey,
	whichever is less
	c. Accessory Building or Structure - 4.5 m
.8 Maximum vertica	I
distance of Base	ment a. 1.4 m above average Finished Grade
above ground	
.9 Lot Coverage	a. 40%
(maximum)	a. 40%

357.4 Subdivision Regulations

Subdivision Regulations Table for RS3-ig Zone		
Column I	Column II	
.1 Lot size (minimum)	a. Interior Lot – 540 m ²	
	b. Corner Lot – 610 m ²	
	c. Interior Through Lot – 540 m ²	
	d. Corner Through Lot – 610 m ²	
	e. Panhandle Lot – not permitted	
	a. Interior Lot – 15.0 m	
	b. Corner Lot – 18.0 m	
.2 Lot Width (minimum)	c. Interior Through Lot – 15.0 m	
	d. Corner Through Lot – 18.0 m	
	e. Panhandle Lot – not permitted	
	a. Interior Lot – 25.0 m	
	b. Corner Lot – 25.0 m	
.3 Lot Depth (minimum)	c. Interior Through Lot – 30.0 m	
	d. Corner Through Lot – 30.0 m	
	e. Panhandle Lot – not permitted	

357.5 Landscaping and Off-Street Parking

Refer to Sections 140 and 150 for requirements pertaining to landscaping and off-street parking.

357.6 Conditions of Use

- .1 [Repealed.] (B/L 3249-2022)
- .2 A Garden Suite shall:
 - a. be limited to one such Use per Lot;
 - b. be limited to a maximum floor area of 55 m² and not be located within a Building that exceeds 55 m² in floor area;
 - c. be located on the same Lot as the Principal Building;
 - d. be located on a Lot other than a Panhandle Lot, with a minimum Front Lot Line length of 12.0 m;
 - e. be located on a Lot with a minimum Lot size of 540 m²;
 - f. be located on a Collector Road or Local Road;
 - g. not be located on a Lot on a cul-de-sac bulb;

Last modified: July 15, 2025


Section 357-Page 2 of 3 Zoning Bylaw No. 2400-2014



357 – Urban Residential Zone, Infill Garden Suite (RS3-ig)

RS3-ig

- h. not be on a Lot in a bare land strata (except where road infrastructure meets City bylaw standards);
- i. not be located between the Principal Building and the Front Lot Line;
- j. not include a Basement; and
- k. not be operated where there is a Residential Care Use, Supporting Housing Use, Boarding Use, or Secondary Suite on the Lot. (B/L 3249-2022, 3670-2025)
- .3 A CSA A277 or Z240 approved Manufactured Home may be permitted as a Garden Suite.
- .4 A Principal Building consisting of more than one Storey shall have reduced massing at the uppermost Storey, to be achieved as follows:
 - The Gross Floor Area of the uppermost Storey shall not exceed 80% of the Gross Floor Area of the Storey immediately below;
 - The front or one or more side Building Face(s) of the uppermost Storey shall be recessed by a minimum of 1.2 m from the Building Face(s) of the Storey immediately below;
 - For the purpose of measuring the recessed area of the uppermost Storey, structural supports of covered verandahs, porches, patios and entranceways shall be considered part of the Building Face(s);
 - ii. Further to Section 357.6.4(b)(i), when a covered verandah, porch, patio or entranceway is included, the minimum Front Lot Line Setback for that portion of the Principal Building may be reduced to 4.5 m;
 - c. The rear Building Face of the uppermost Storey shall not project beyond the rear Building Face of the Storey immediately below, except for permitted projections into Setbacks as specified in Section 140.4.2.(a); and
 - d. Any portion of floor area above which there is a vertical distance that exceeds 4.3 m, measured from the surface of the floor to the underside of the ceiling, shall be counted twice in the calculation of Gross Floor Area.

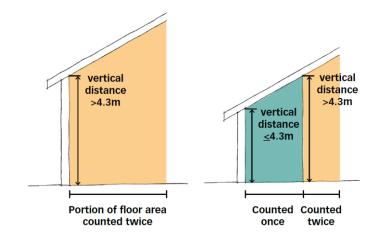

Last modified: July 15, 2025

Section 357-Page 3 of 3 Zoning Bylaw No. 2400-2014

